Perlator®
Faucet Aerator – Full Flow
Regular Size

NEOPERL®

flow, stop and go®

Features and Benefits

▶ Watercolours® design: Color coding to identify flow rate and stream pattern.

▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.

▶ Integrated anti-liming Honeycomb replaces conventional wire mesh screens prone to lime build up.

▶ Anti-clogging dome screen filters sediment and particles.

▶ Also compatible with regular and vandal proof M22 and M24 metric housings.

▶ Available housing finishes: unplated, chrome and PVD.

▶ Laser marked housings: custom logo and/or statutory marks.

Certifications
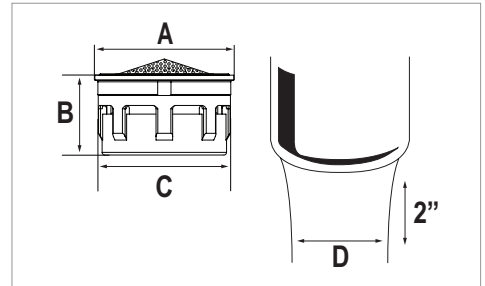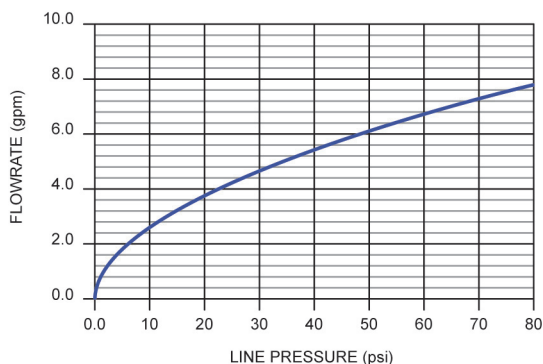
ANSI/NSF 61

Options Available

Part #	Designation
40.3030.000	Insert only
40.3030.613	Regular male 15/16"-27
40.3030.623	Regular female 55/64"-27
40.3030.673	Regular dual thread 15/16"-27 / 55/64"-27
40.3030.723	Vandal proof regular male 15/16"-27
40.3030.733	Vandal proof regular female 55/64"-27
40.3030.603	Vandal proof dual thread
BX.399C.1	Regular vandal key

*Other combinations also available
- WSA applies to insert only

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 13	≈ 1/2

Housings

Regular Male

Regular Female

Regular Dual Thread

VP Male

VP Female

VP Dual Thread

Color Code

Dome: Blue	Diffuser: White	Basket: Dark Gray

Flow Rate Curve

Technical Data

Materials:	Body	Acetal
	Washer	EPDM
Wetted surface area:		2782.51 mm^2

Continuous

max. 50 °C / max. 120 °F

90 psi max. / 6 bar max.

Short-term (5 minutes max.)

max. 70 °C / max. 160 °F

125 psi max. / 8.5 bar max.