

Perlator® Faucet Aerator - Full Flow Class A Regular Size



flow, stop and go®

Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Patented construction provides a splash-free stream, well aerated and soft to the touch.
- ▶ Integrated anti-liming Honeycomb replaces conventional wire mesh screens prone to lime build up.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Also compatible with regular and vandal proof M22 and M24 metric housings.
- ▶ Available housing finishes: unplated, chrome and PVD.
- ▶ Laser marked housings: custom logo and/or statutory marks.

Certifications

ANSI/NSF 61

Options Available



Part #	Designation
40.2003.000	Insert only
40.2003.613	Regular male 15/16" -27
40.2003.623	Regular female 55/64" -27
40.2003.673	Regular dual thread 15/16" -27 / 55/64" -27
40.2003.723	Vandal proof regular male 15/16" -27
40.2003.733	Vandal proof regular female 55/64" -27
40.2003.603	Vandal proof dual thread
BX.399C.1	Regular vandal key

*Other combinations also available
- WSA applies to insert only

Color Code

Dome: Light Blue	Diffuser: Light Blue	Basket: Dark Gray
------------------	----------------------	-------------------

Flow Rate Curve

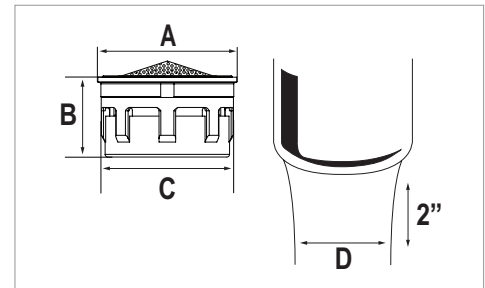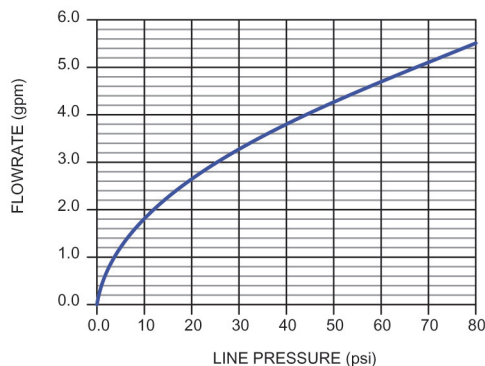

Dimensions

No	mm	In
A	20.88	.822
B	12.00	.472
C	19.97	.786
D	≈ 13	≈ 1/2

Housings



Technical Data

Materials: Body Acetal
Washer EPDM
Wetted surface area: 4011.02 mm²

Continuous		Short-term (5 minutes max.)	
max. 50 °C	max. 120 °F	max. 70 °C	max. 160 °F
90 psi max.	6 bar max.	125 psi max.	8.5 bar max.

NEOPERL®, Inc., Waterbury, CT • Tel: 203-756-8891 • Fax: 203-755-5717 • www.neoperl.com